

# Colorcrete Base.

**Colorcrete Base is the collection of pigment pastes to carry out mixing colors for microcements.**



## Properties

- High alkali resistance.
- High outdoor stability.
- High colour stability.
- Compatible with aqueous systems.

## Consumption

Depending on the colour of the dose to be made.

## Application

Ready-to-use product, shake before use. No dilution required.

Colorcrete Base is used for a wide range of applications such as:

- Paints, varnishes, enamels, water-based lasur.
- Crafts, handicrafts
- Coatings, plastering, rendering, microcement, printed concrete, etc.
- In our systems: Concrete, Limecrete, Concrete Pox.


Specially designed for alkali and sunlight resistance.

## Packaging

Available in 0,5 and 1 litre containers.

## Technical data

Colours:

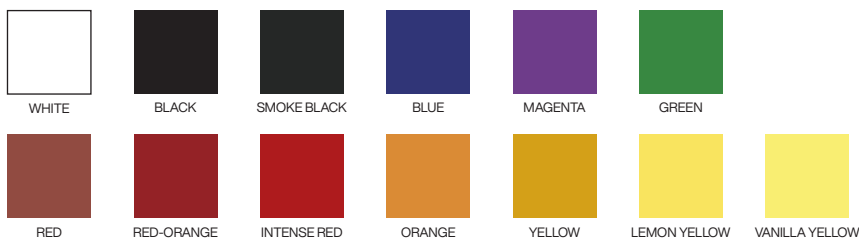

The colours shown are digital simulations of Luxury Concrete® colours.

- Density (g/cm<sup>3</sup>)<sub>20 ± 1</sub>
- Viscosity(L<sub>3</sub>, 20 rpm) 5000 ± 3000mPa·s

*\*The colour intensity may decrease in outdoors.*

## Special precautions

To prevent the product from drying out or thickening, close the lid after each use.  
Not suitable for solvent or 100% solids systems.  
In case of skin contact wash with soap and water.  
Never use solvents or thinners. Do not swallow. In case of ingestion do not induce vomiting and seek medical attention immediately.

The following measures are recommended:

- Protective goggles to prevent splashing.
- Rubber gloves.

Empty containers should be disposed of in accordance with current legislation.  
For further information please refer to the product safety data sheet.

## Storage conditions

The product should be stored in its closed original packaging, protected from weather conditions at temperatures between 10°C and 30°C in a dry and well ventilated place, away from direct heat and sunlight. Shelf life is 1 year from the date of production, if stored in well-preserved conditions.